

COMMANDER Omni Fiberglass Antenna, 406-512 MHz, 5.1 dBi, N Female

Please visit us on the internet at <http://www.commandertech.com>
Product Description

Commander Base Station Antennas incorporate the design features of broadband capability, superior lightning protection and true omnidirectional gain in excess of 3 dBd. All copper and brass connections are soldered, reducing intermodulation. Mounting hardware is included.


Features/Benefits

Fiberglass construction protects radiating elements in corrosive environments. DC grounded - affords lightning protection. Copper radiating elements minimize possibility of intermod generation.


Technical Specifications

Frequency Band	406-512 MHz
Horizontal Pattern	Omni Directional
Antenna Type	Fiberglass Omni
Electrical Down Tilt Option	Fixed
Gain, dBi (dBd)	5.1 (3) avg
Frequency Range, MHz	406-512
Connector Type	N Female
Connector Location	Bottom
Mounting Type	Fixed
Electrical Down Tilt, deg	0
Orientation	Upright
Mounting Hardware	46 Clamp Set
Rated Wind Speed, km/h (mph)	282 (175)
Gain (Omni), dBi (dBd)	5.15 (3)
VSWR	< 1.5 : 1
Vertical Beamwidth, deg	35
Polarization	Vertical
Maximum Power Input, W	500
Lightning Protection	Direct Ground
3rd Order IMP @ 2 x 43 dBm, dBc	-130
Impedance, Ohms	50
Overall Length, m (in)	1.022 (40.25)
Element Housing Length, m (in)	0.742 (29.25)
Mounting Pipe Diameter, m (in)	0.07 (2.75)
Support Pipe Length, m (in)	0.28 (11)
Weight, kg (lb)	3.4 (7.5)
Radiating Element Material	Copper & Brass
Element Housing Material	Fiberglass
Support Pipe Material	Aluminum Alloy
Max Wind Loading Area m ² (ft ²)	0.116 (1.245)
Survival Wind Speed, km/h (mph)	322 (200)
Bend Mom @ Rated Wind 1" Below Top of Mt Pipe, N m (ft lbf)	174 (128)
Wind Load - Side @ Rated Wind, N (lbf)	199 (44.8)
Shipping Weight, kg (lb)	9.52 (21)
Packing Dimensions, HxWxD mm (in)	1,727 x 100 x 100 (68 X 3.94 X 3.94)
Packing Dimensions, HxWxD, m (ft)	1.72 x 0.1 x 0.1 (5.66 x 0.33 x 0.33)
Shipping Dimensions of Accessory, HxWxD, m (ft)	Packed with Antenna
Shipping Mode	UPS Shippable


Notes

All information contained in this datasheet is subject to confirmation at time of ordering

Other Documentation

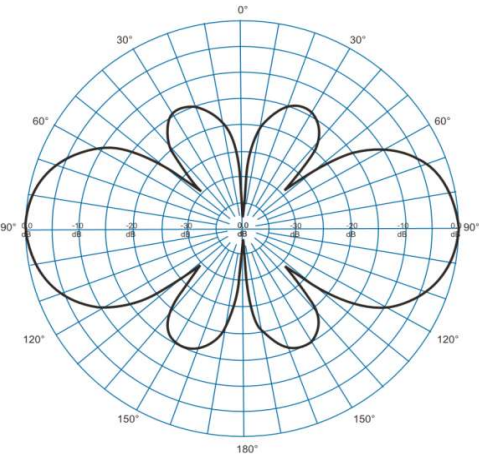

Vertical Pattern

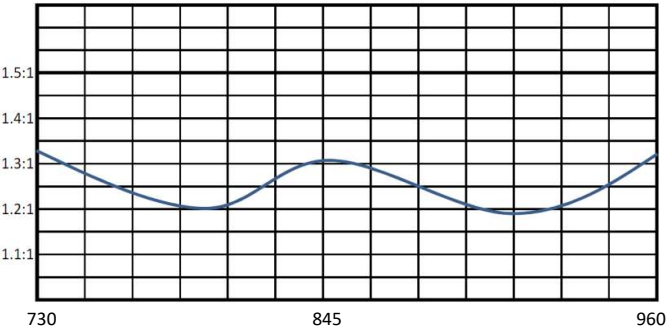

Typical VSWR Results

All information contained in this datasheet is subject to confirmation at time of ordering