

TITANIUM[®] UDL 50

SYNTHETIC ROOFING UNDERLAYMENT

COMMERCIAL GRADE




- 5 times lighter and 25 times stronger than #30 felt
- 50 year limited warranty
- Synthetic construction inert to mold growth
- Tougher, thicker robust construction that can withstand harsh environmental conditions
- Patented Sure-Foot[®] slip resistant nodular walking surface and an advanced resin technology that provide superior steep slope walk-ability
- Contributes to LEED[®] points
- SCS certified minimum of 20% reclaimed content (100% Recyclable)
- Class A Fire ASTM E108, Meets and exceeds ASTM D226
- Meets Class 4 Hail Rating
- All temperature performance -40°F to 240°F (-40°C to 115°C)
- 6 month UV exposure rating
- Cool light gray surface, doesn't expand or contract
- Dual logo custom printing available

SPECIFICATIONS

LENGTH PER ROLL:	250' / 76.2 m
WIDTH PER ROLL:	48" / 122 cm
WEIGHT PER ROLL:	48 lbs / 21.8 kg
NET ROLL SIZE:	10 sq / 93 m ²
ROLLS PER PALLET:	25
PALLET WEIGHT:	1250 lbs / 567 kg

**PREMIUM LEAK PROTECTION
SUPERIOR 30 lb FELT REPLACEMENT
AIR, WATER & VAPOR BARRIER
HEAVY DUTY COMMERCIAL GRADE**

**FOR USE UNDER ALL: PREMIUM METAL, TILE,
CLAY, CONCRETE, SLATE & HEAVY WEIGHT
LAMINATED SHINGLES**

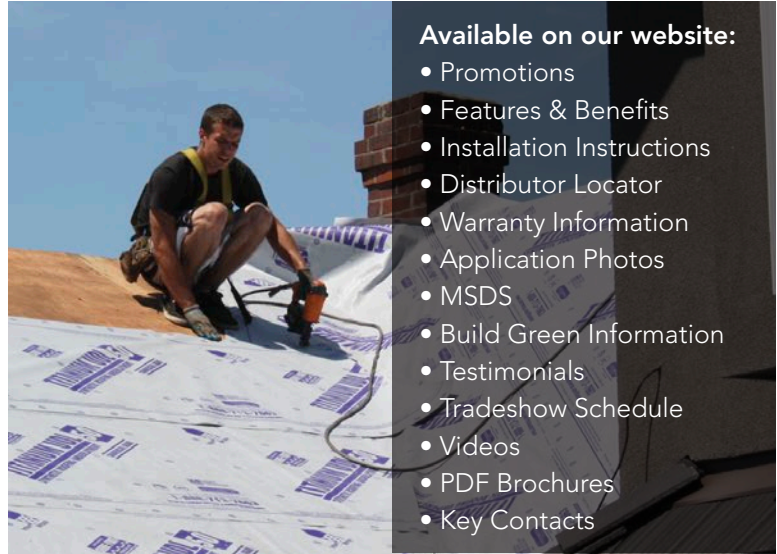

Available on our website:

- Promotions
- Features & Benefits
- Installation Instructions
- Distributor Locator
- Warranty Information
- Application Photos
- MSDS
- Build Green Information
- Testimonials
- Tradeshow Schedule
- Videos
- PDF Brochures
- Key Contacts



CAN/CSA A220.1
FLORIDA BUILDING CODE
CLASS A ASTM-E108
FIBREGLASS SHINGLES



TEST & STANDARD	UDL50 TYPICAL VALUE	ASTM #30 FELT TYPICAL VALUE
Class A Fire ASTM E108	Pass	N/A
Nail Sealability Modified ASTM D1970	Pass	N/A
Permeability ASTM E96	0.05 perms	1.75 perms
Water Transmission ASTM D4869	Pass	Pass
Tear Strength ASTM D4533	MD 55 lbs (25 kg) CD 55 lbs (25 kg)	MD 4 lbs (1.8 kg) CD 2 lbs (0.9 kg)
Tensile Strength ASTM D751	MD 178 lbs (81 kg) CD 176 lbs (80 kg)	MD 70 lbs (32 kg) CD 38 lbs (17 kg)
Burst Strength ASTM D751	300 psi (2065 kPa)	62 psi (430 kPa)
Elongation ASTM D751	MD 20 % CD 20 %	MD 2% CD 2%
Weight per Square ASTM D5261	4.7 lbs (2.13 kg)	27.5 lbs (12.5 kgs)
Minimum Thickness ASTM D1777	30 mils (0.75 mm)	60 mils (1.5 mm)
Temperature Range	-40°F to 240°F (-40°C to 115°C)	



weaving a better world™

InterWrap[®] Roofing Products Division

Charleston, SC • Vancouver, BC • Mission, BC • Montréal, QC
 Web: www.InterWrap.com/titanium | E-mail: info@interwrap.com
 Toll Free: 888 713 7663 | Tel: 778 945 2888

This product is manufactured in accordance with national standards which allow for non-critical variances in weights and measures.
 Test data is based on average taken over several production runs and should not be considered or interpreted as minimum or maximum values. Values are typical data and not limiting specifications.
 All values ± 10 %. UDL50_SS_6June2014