
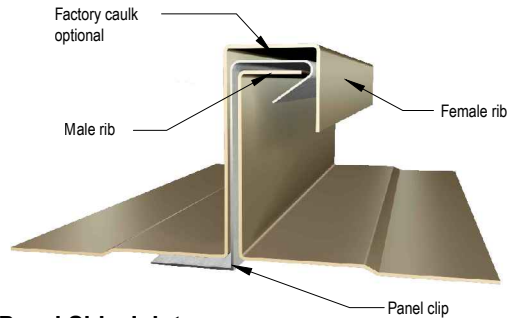


ZIP-LOK

ZIP-LOK 2" Standing Seam Panel

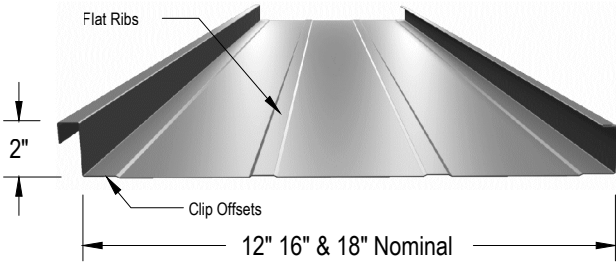

Panel Side Joint

Mechanically Seamed for weathertightness and resistance to wind uplift.

Applications

Structural roofing on slopes 1" per foot or greater. Continuous lengths without panel laps. Vertical walls, radius barrels and conical tapers (conical panels not available with ribs or clip offsets).

Substrates

Open purlin / Re-Roof Framing / Plywood / Metal Deck

Materials

Standard Gauges

Aluminum (3000 alloy).....	.032"	.040"
Galvanized coated steel (G-90).....	24 ga.	22 ga.
Alum-Zinc coated steel (AZ-50 & AZ-55).....	24 ga.	22 ga.
Copper & lead coated Copper.....	16 oz.	20 oz.
Zinc & Pre-Weathered Zinc7mm	.9mm

Finishes

Kynar & Metallic Fluoropolymer Coatings
Mill Finish, Brushed, Anodized
Texture: Smooth or Stucco Embossed


Manufacturing

Factory or Site Roll Formed


Testing / Agency Approvals

UL-580 Tested UL Listed Class 90 Construction #298 & #482
ASTM E-283 Tested ASTM E-331 Tested ASTM E-1592 Tested
Concentrated Load Tested Fla. Build. Code Approved (2/12 Slope min)

Components

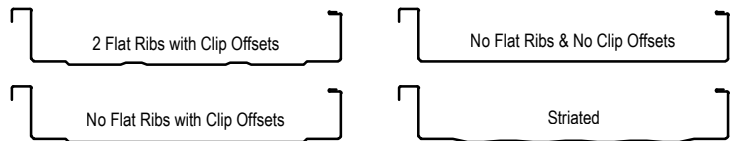


Some panels configurations are not suitable for all applications. Contact sales & engineering for more information.




#1158556 Float Clip

Allows for 2 1/16" total thermal expansion of the panel system.
Holds Panel 3/8" above substrate.




#1082066 Fixed Clip with Single Lock Panel Application

Single lock panel system (clip will allow for thermal expansion).
Holds Panel 3/8" above substrate.



#1082066 Fixed Clip with Double Lock Panel Application

Double lock panel system (does not allow for expansion). Note: Maximum length varies with material selected. Consult M&E engineering for max. panel length.
Holds Panel 3/8" above substrate. Also can be used as a fixed clip in conjunction with #1158556 float clip.



#20ZC Ridge/Hip Z Closure

Made from the same material required for the project.
Supplied in 10'-0" lengths.





#20GC Continuous Gable/Endwall Clip

Supplied in 10'-0" lengths.


S-5-U HD Clamp

Aluminum block for use with S-5! snow retention system and for other practical purposes.

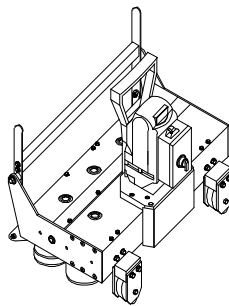

#20MS Mechanical Seamer Tool

To mechanically seam a single or double lock panel. Available for Rent or Purchase.




Single Lock



Double Lock


S-5! ColorGard Snow Retention System

Refer to PS-12 for more information.

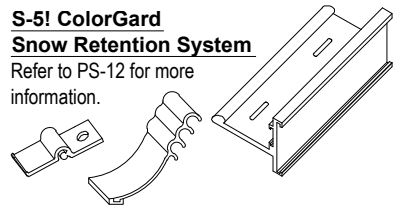


#20HS Hand Seamer Tool

To seam a single lock 2" panel where the mechanical seamer tool can not reach



Updated November 2012

Merchant & Evans, Inc.
308 Connecticut Drive
Burlington, NJ 08016



Phone: 800-257-6215
Phone: 609-387-3033
Fax: 609-387-4838
www.ziprib.com